



FRENCH LEADER IN
PREFABRICATED BATHROOMS

MADE IN FRANCE

ONDINE


SECTOR : HEALTH

BAUDET ACCESS[®]



Dimensions ONDINE (Included the cladding)

Length = 2140 mm	Surface int. = 2,7 m ²
Width = 1975 mm	Weight = 310 kg
Height = 2220 mm	Door of 900 mm

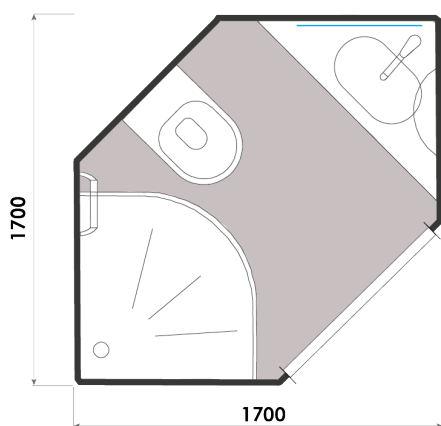

The ONDINE bathroom is the ideal solution
for refurbishment projects.

Our Accreditation



Technical advice n° 9/15-1019
from French CSTB
(Scientific and Technical Building Centre)

Discover our range at www.baudet-sa.com

* Photos non contractuelles



BAUDET ACCESS

ONDINE

MADE IN FRANCE 

Features

DOOR

- White lacquered door frame
- White lacquered hinged door
- Standard door lock
- 1 robe hook

BASIN

- Concrete washbasin, white gel coat finish
- Towel hanging cut in the front of the basin
- Basin mixer
- Mirror

SHOWER

- Shower set including flexible hose, head and soap dish
- Shower mixer
- Shower curtain mounted on aluminium rail
- 2 straights grab rails

WC

- Wall hung toilet pan
- White toilet seat
- Cistern dual flush 3/6L
- White flush panel
- 1 toilet roll holder

Structure

- GRP Structure
- Pod finish : gloss appearance
- Floor : free standing resin concrete non-slip finish
- Integrated shower tray
- Sealing between the wall provided by a compressed foam

Connections

Acces possible through hatches (ceiling and technical shaft)

ELECTRICITY/CVC


- Power socket
- 2 IP65 spots lights connected to the junction box
- Earthing : cable section 6 mm²
- VMC self-adjusting 30 m³/h – Ø 125 mm

WASTE/SUPPLY


- Hot and cold water multilayer pipe insulation are connected to 1/2 "
- Basin and shower waste pipes - PVC Ø 40
- Toilet waste pipe - PVC Ø 100

Handings

Our bathrooms can be easily adapted to the layout of your room.



Option 01



Option 02

Note

The installation of our bathrooms requires services in place prior to delivery, these are not included by BAUDET.

- Our bathroom are designed to be cladded with standard plasterboard (BA 13mm)
- Power supply cables for the lights and the light switch are supplied by electrician on site.
- Plumbing has to be ready for connections including isolation valves.
- The floor surface to receive the pod has to be prepared according BAUDET's recommandations, also the recess, drilling and refilling of the floor.

Tel. +33(0)2 51 66 27 85
Fax +33(0)2 51 66 27 63
contact@baudet-sa.com

Discover our range at www.baudet-sa.com